

Date tehnice pentru produs: MG968400--

Transformator de curent demontabil

400/5A, 60x30mm



Fișe tehnice

Notă	Simple installation of a current transformer in an existing low-voltage system
Intended use	for copper bars up to 60 x 30mm for cables up to diameter 30mm
Rated current primary side I _{pr} (A)	400
Rated frequency (Hz)	50-60
Thermal class	A
Short-time current I _{th}	< 60I _{pr}
Rated dynamic current I _{dyn}	2.5I _{th}
Safety factor	≤ 5
Rated current secondary side I _{sr}	5A
Insulation requirements	
Max. Operating voltage U _m	0.72kV r.m.s.
Isolation test voltage	3 kV R.M.S. 50 Hz/1 min
Carcasă	
Housing material	Plastic, self-extinguishing
Metodă de montaj	screw mounting

Fișe tehnice - Continuare

Accuracy classes


Burden

Class 0.5 (2.5VA)


Class 1 (3.75VA)

Class 3 (7.5VA)


Schema electrica: Transformator de curent demontabil 400/5A, 60x30mm

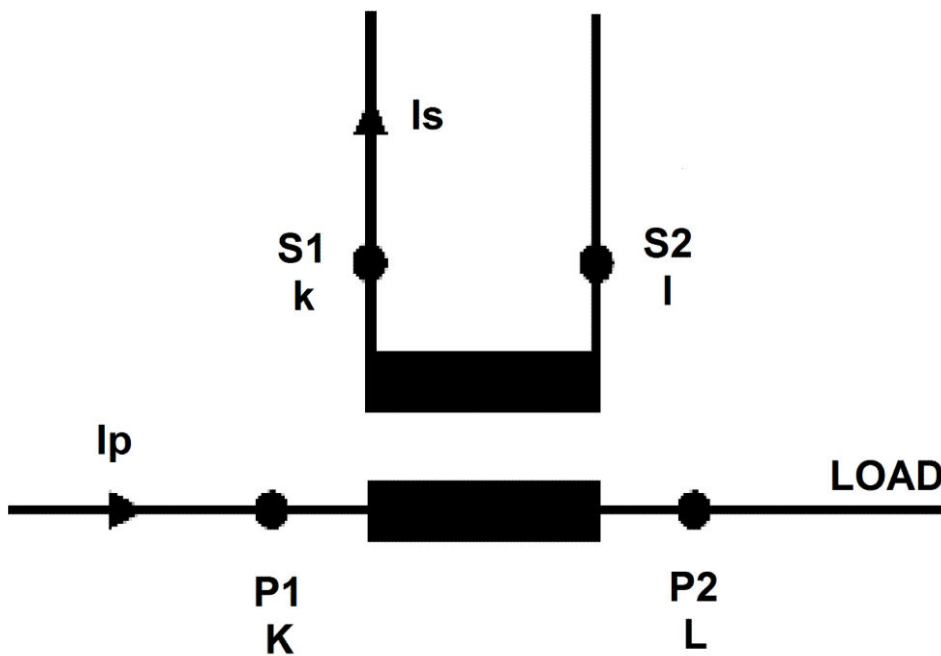

Maßbild

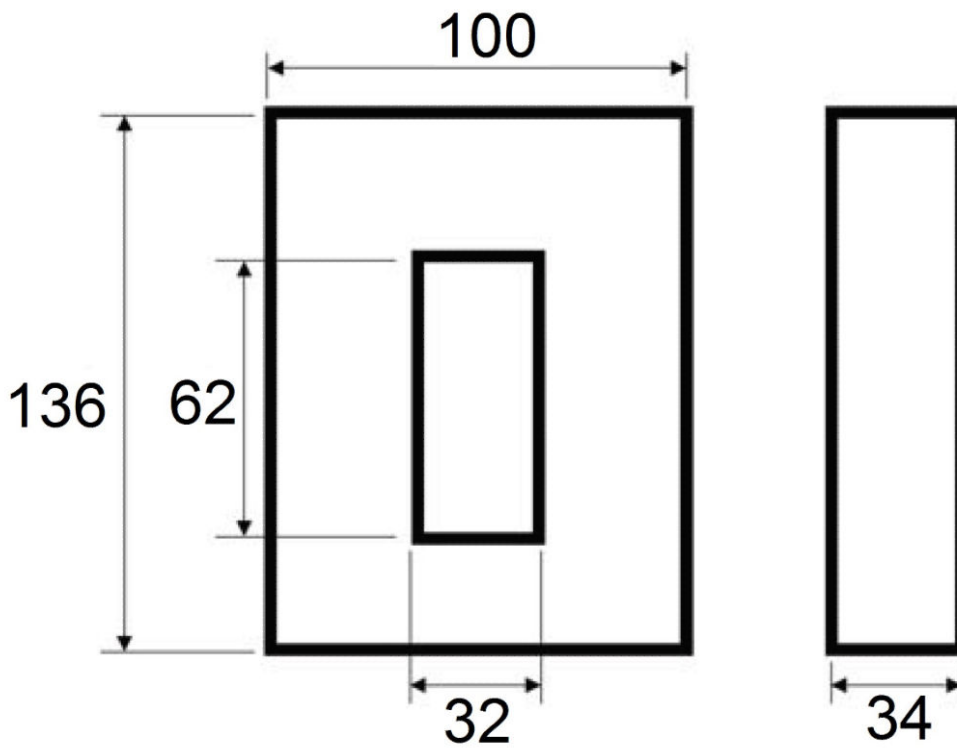

Maßbild

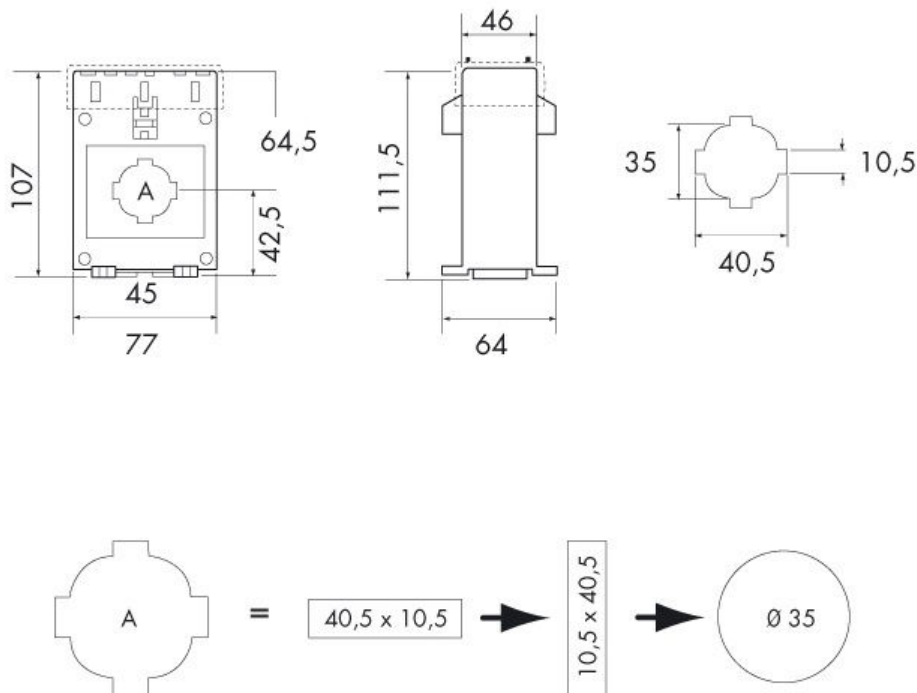

Tabel articole

Descriere	Cod comandă
Transformator de curent demontabil 400/5A, 60x30mm	MG968400
Accesorii opționale	
Contor digital kWh 1A/5A (6A), 3faze, 2 tarife, MID cerere ATENȚIE: CONSTANTA SE POATE SETA O SINGURA DATA! Măsoară energia consumată și injectată în rețea (2 direcții)	MGX20006
Contor digital kWh 1A/5A(6A), 3f, 2 tarife, MID cerere, M-BUS ATENȚIE: CONSTANTA SE POATE SETA O SIGURA DATA! Măsoară energia consumată și injectată în rețea (2 direcții)	MGX20306
Contor digital kWh 1A/5A (6A), 3f, 2 tarife, MID cerere, Modbus ATENȚIE: CONSTANTA SE POATE SETA O SINGURA DATA! Măsoară energia consumată și injectată în rețea (2 direcții)	MGX20406