


NH.bus-mounting fuse base, 400 A (03 795)

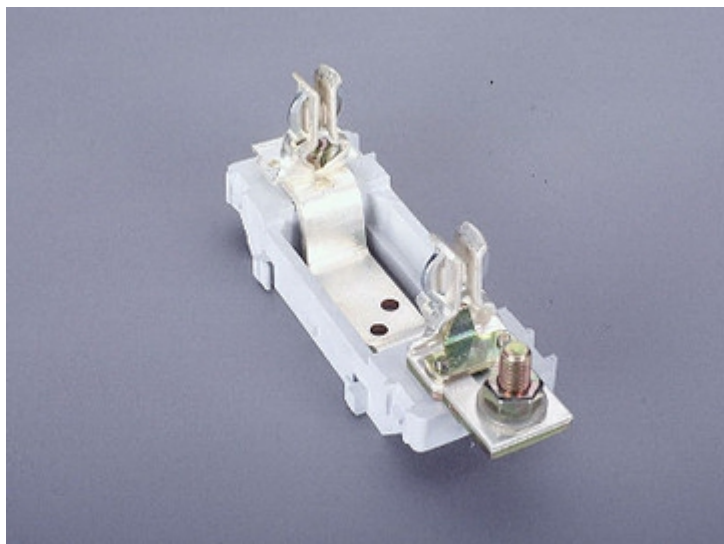

Description

Article

Part No.: 03 795

QUADRON® 60Classic

NH.bus-mounting fuse base, 400 A

screw, screw-on on bar

size 2 / 1P

System

100Energy

185mm-System

Product group 10

Subgroup 33

pack size 3

EAN 4021267037956

Catalog page 2015 : 3/3

eCl@ss 6.1 27142106
eCl@ss 7.1 27142106
ETIM 4.0 EC000067
ETIM 5.0 EC000067

Approvals

Standards

IEC 60269-1:2006 + A1:2009 + A2:2014
IEC 60269-2:2013

Product data

Electrical data

Rated current (IEC): 400 A
Rated voltage (IEC) AC: 690 V
Rated voltage (IEC) DC: 440 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 23.9 W.
(The power dissipation for operation with rated current would be 37.4 W.)

rated isolation voltage U_i (AC): 800
V
Rated surge voltage U_{imp} : 6 kV
max. permitted voltage (IEC) AC: 800
V
max. permitted voltage (IEC) DC: 800
V

breaking capacity with fuses: 50 kA

for fuse links IEC 60269-2 / DIN VDE 0636-201 size 2 up to 45W power dissipation

Mechanical data

W x H x D: 65 x 193 x 113
Weight: 68.5 kg/100
Poles: 1-pole

Type of fastening: can be screwed onto drilled busbar,
connection screw:
screw connection M10, 18 - 22Nm torque

Terminal points

NHUT_SCHRAUBE_M10

Material properties

Main body: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Contacts: spring-loaded copper contacts, silver plated

Connecting screw M10, galvanized, chromized
screws:


Accessories




03 163
knife link 400 A
size 2



03 502
NH fuse extractor handle
open
size 000 - 3



03 793
shock protection in two parts
for NH fuse-base
size 2



79 449
grip lug cover
for NH fuse base
NH 1 - 3