

Date tehnice pentru produs: MGF3900R--

# Modul comunicatie serial RS485



## Fișe tehnice

Tip	accesorii
<b>(Inputs and supply galvanically isolated)</b>	
Standard	RS485 - 3 Draht
Transmission	asynchronous serial
Protocol	compatible JBUS / MODBUS
Number of bits / stop bit	8 / 1
Data readout time (ms)	200
Number of devices to be connected	32 (up to 255 with RS485 repeater)
Greatest distance of devices	1200m

## Fișe tehnice - Continuare

### Programmable parameters

Address	1 ... 255
Bit rate	4.800 - 9.600 - 19.200 - 38.400 bit/s
Parity bit	none - even - odd

### Auxiliary voltage


Consum de putere	≤ 5VA (combination of NA96 + module MGF3900R)
Isolation test voltage	2 kV R.M.S 50 Hz/1 min (combination of NA96 + MGF3900R module)
Test circuit	Measuring input, auxiliary voltage, output 1 - output 2
disipare (W)	1,00

### Carcasă

Housing type	Plug-in housing with connection for NA96
Depth (incl. Modules) (mm)	81
Conexiune	Screw connection wire (fixed) max. 4,5mm <sup>2</sup> Screw connection wire (flexible) max. 2,5mm <sup>2</sup>
Housing material	Polycarbonate, self-extinguishing

## Schema electrica: Modul comunicatie serial RS485

# RS 485

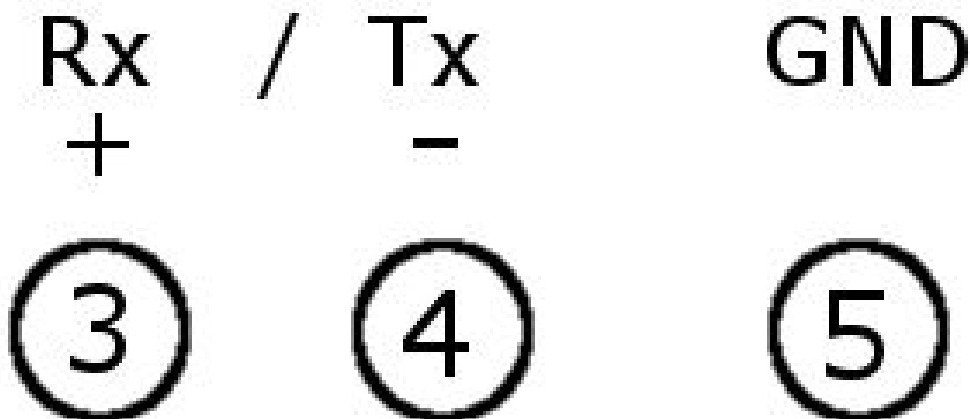

## Tabel articole

Descriere	Cod comandă
Modul comunicatie serial RS485	MGF3900R
<b>Accesorii necesare</b>	
Analizor de rețea NA96, 96x96mm, aparat de bază	MGF39000
Analizor de rețea NA96+ 96x96mm	MGF39001