

Date tehnice pentru produs: IKB01025--

Main branch terminal, 1-pole, 100A, in. 2x25mm², out.6x10mm²

Input terminal 2 x 25mm², outgoing terminals 6 x 1.5 - 10mm²




Fișe tehnice

Standard produs	EN 60947-7-1
Tensiune nominală	1000VAC
Current carrying capacity (A)	101A

Technical data

Vorschriften:	Zulassung nach IEC 60947-7-1		
Strombelastbarkeit:	Cu 101A		
Bemessungsquerschnitt:	25mm ²		
Anschlussquerschnitte:	Anzahl Anschlüsse: 2x 25mm ² (Alle Leiterarten)		
	IEC 60947-7-1		IEC 61238-1
	Cu		Al
	Mehrdrähtig	Feindrähtig mit Aderendhülse	
	25mm ²	/	
	16mm ²	3Nm	/
	10mm ²		
	6mm ²		
	4mm ²		
	2,5mm ²	/	/
1,5mm ²			
Abisolierlänge:	17mm		
Innensechskant:	2xM6 +/- PZ2		
Anschlussquerschnitte:	Anzahl Anschlüsse: 6x10mm ² (Alle Leiterarten)		
	10mm ²	/	
	6mm ²	2Nm	/
	4mm ²		
	2,5mm ²		
	1,5mm ²		
	Abisolierlänge	9mm	
Schraube	M5 +/- PZ2		
Werkstoffe:	Klemmkörper:	Messing (CuZn39Pb2)	blank
	Gehäuse:	PA 6 (Halogenfrei)	
	Schrauben:	Stahl	Zn dickschichtpassiviert
Flammwidrigkeit:	Selbstverlöschend		
Ausführung:	Fingersicher IP 20		

Desen dimensional: Main branch terminal, 1-pole, 100A, in. 2x25mm², out.6x10mm²

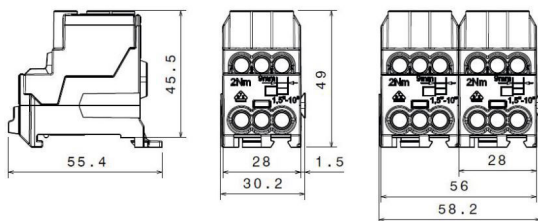

Descriere	Cod comandă
Main branch terminal, 1-pole, 100A, in. 2x25mm ² , out.6x10mm ² Input terminal 2 x 25mm ² , outgoing terminals 6 x 1.5 - 10mm ²	IKB01025