


## changeover switch 3-pole + N (23125)

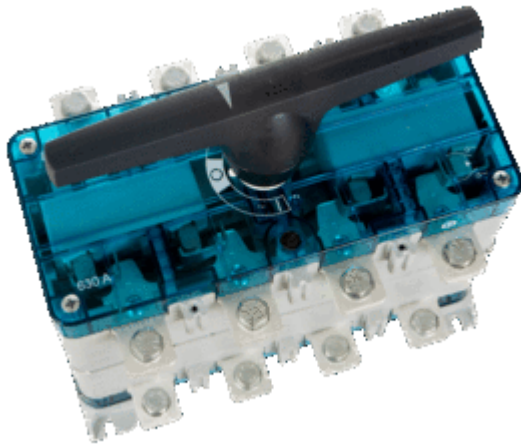

The picture may show a similar product.

### Description

Part No.: 23125

CAPUS<sup>®</sup> Panel

changeover switch 3-pole + N

screw M10

630 A

N on right side

BB32-630/3+N

**NEW**

### System

Mounting plate

Product group 14

Subgroup 39

pack size 1

EAN 4021267231255

ECLASS 6.1 27371403  
ECLASS 7.1 27371403  
ETIM 4.0 EC001040  
ETIM 5.0 EC001040

## Approvals

### Standards

IEC 60947-1:2007 + A1:2010 + A2:2014 + A3:2020  
IEC 60947-6-1:2021

### Approvals

EAC



type number: BB32-630/3P+N  
EAC Type: LTS

## Technical data

size: 3

### Details IEC

#### Standards

IEC 60947-1:2007 + A1:2010 + A2:2014 + A3:2020  
IEC 60947-6-1:2021

#### Electrical data IEC

Rated current (IEC): 630 A  
rated voltage (IEC) AC: 690 V

rated isolation voltage  $U_i$  AC: 1000 V

rated surge voltage  $U_{imp}$ : 12 kV

rated short-time withstand current  $I_{CW}$  (0.3 s) max.: 30 kA

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 240.0 W.

(The power dissipation at full load would be 375.0 W.)

Gebrauchskategorien siehe Datenblatt (unter Downloads)

### **Mechanical data**

W x H x D: 297 x 164 x 230

weight: 1200.0 kg/100


poles: 3-pole+N

### **Reference**

passes Null when reversing

N is switched leading when switched on, lagging when switched off

## Accessories



**23934**

CAPUS® Panel  
door coupling rotary drive  
for: BB32 630 A / 1000 A / 1250 A / 1600 A


**NEW**



**23937**

CAPUS® Panel  
connection space cover  
for covering all connections, dark grey  
for: BB32 630 A / 1000 A

**NEW**



**23921**

pilot switch  
1 n/c + 1 n/o, plug connectors 6.3 x 0.8  
for: S32 250 A / 400 A / 630 A / 1000 A / 1250 A / 1600 A / 2500 A / 3150 A

**NEW**



**23924**

extension shaft, 300 mm long  
for: S32 630 A - 3150 A

**NEW**



**33381**

extension shaft, 550 mm long  
LTS-800, LTS-F 630



**23947**

CAPUS® Panel  
connection bridge  
for: BB32 630 A 3P+N

**NEW**



**23928**

connection terminal

2x 95 - 150 mm<sup>2</sup>

for: S32 630 A

**NEW**



**23929**

connection terminal

3x 50 - 95 mm<sup>2</sup>

for: S32 630 A

**NEW**